


## VM-4000

### Rubber Mount

(Deflection : 6~16mm)

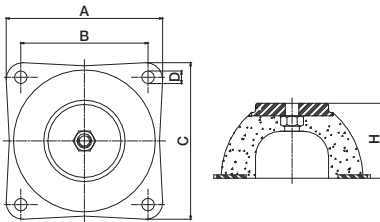

#### ● Features

VM-4000 mounts is specifically designde to give large deflection at low loads. Although the mount design allows high deflection, the mountings are compact in weigh and easy to install. Provides passive vibration isolation on electronic instruments, measuring equipment and test cells.

#### ● Dimension & Selection Guide


Type	Capacity (kgf)	Hardness (Hs)	Weight (kg)	Dimension(mm)					
				A	B	C	D	H	Level Bolt
VM-4053	80	45	6	138	100	99	11	46.7	M12
VM-4058	100		9	150	126	108	12	54.7	M12
VM-4078	300		12	150	150	150	13	71.8	M14
VM-4100	500		16	200	189	200	19	93.8	M18

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.

## VM-5000

### Rubber Mount

(Deflection : 15mm)

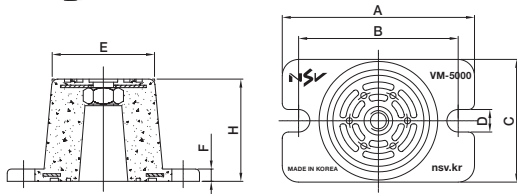

#### ● Features

It is a mount with top and bottom reinforcing plates made of CR (neoprene) type synthetic rubber having excellent oil and ozone resistance. A round-shaped rib line is on the top and bottom of the mount to prevent slipping from the equipment and the guide hole for anchoring is on the base plate for easier installation. It is simple, but has the largest static deflection, which makes it the most efficient anti-vibration mount with a wide range of applications.

#### ● Dimension & Selection Guide

Type	Capacity (kgf)	Hardness (Hs)	Spring Constant (kgf/mm)	Weight (kg)	Dimension(mm)							
					A	B	C	D	E	F	H	Level Bolt
VM-5050	300	60±5	20	0.26	94	78	60	11	50	6	46.7	M12
VM-5065	500		34	0.52	122	102	82	13	66	8	54.7	M12
VM-5085	1000		67	0.84	150	128	104	13	87	8	71.8	M14
VM-5115	2000		133	1.54	188	164	130	14	114	8	93.8	M18


(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.

## VB-1000

### Rubber Mount

(Deflection : 5.0~9.0mm)

(The model name of VB product has changed to VB-1000)



#### ● Features

As a Bobbin (cylindrical) mount, it has the reinforcing of a steel plate on the top and bottom. It is excellent in reducing vibration and structure-borne noise resulting from impact. It is made of neoprene synthetic rubber, having outstanding oil and ozone resistance, and with the fixing rod on the top and bottom, it can be easily fastened using a nut.

#### ● Usage

- For small pumps, small ventilators, package air conditioning systems and plant rooms
- For all kinds of industrial machines and equipment

#### ● Dimension & Selection Guide

Type	Capacity (kgf)	Hardness (Hs)	Deflection (mm)	Dimension(mm)				
				A	B	H	H1	Bolt
VB-1040	50	60±5	5.0	40	35	87	60	M8X30
VB-1050	70			50	40	92	65	M8X30
VB-1060	100			60	40	100	70	M10X35
VB-1070	180		7.0	70	50	110	80	M10X35
VB-1080	300			80	50	110	80	M10X35
VB-1100	500			100	55	124	90	M12X40
VB-1120	800	9.0	9.0	120	55	124	90	M16X40
VB-1150	1000			150	60	150	105	M16X50

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.